

ALDRIDGE

S-LED₂



S-LED₂ Stainless Steel LED

S-LED₂ Stainless Steel LED



Product Description

- Housing: Stainless Steel
- Diffuser: Tempered Glass (clear/frosted) or PC Opal Diffuser 90°, 120° Beam
- High Luminous Efficiency
- IP65 Outdoor Rated


Applications

- Manufacturing Plants
- Warehouses
- Depots
- Poultry Farms
- Workshop Areas
- Parks
- Food Processing Plants

Features

- Vandal Resistant IK10 Rated
- Over 70% Energy Savings Compared to Conventional Battens
- 5 Years Warranty

Dimensions

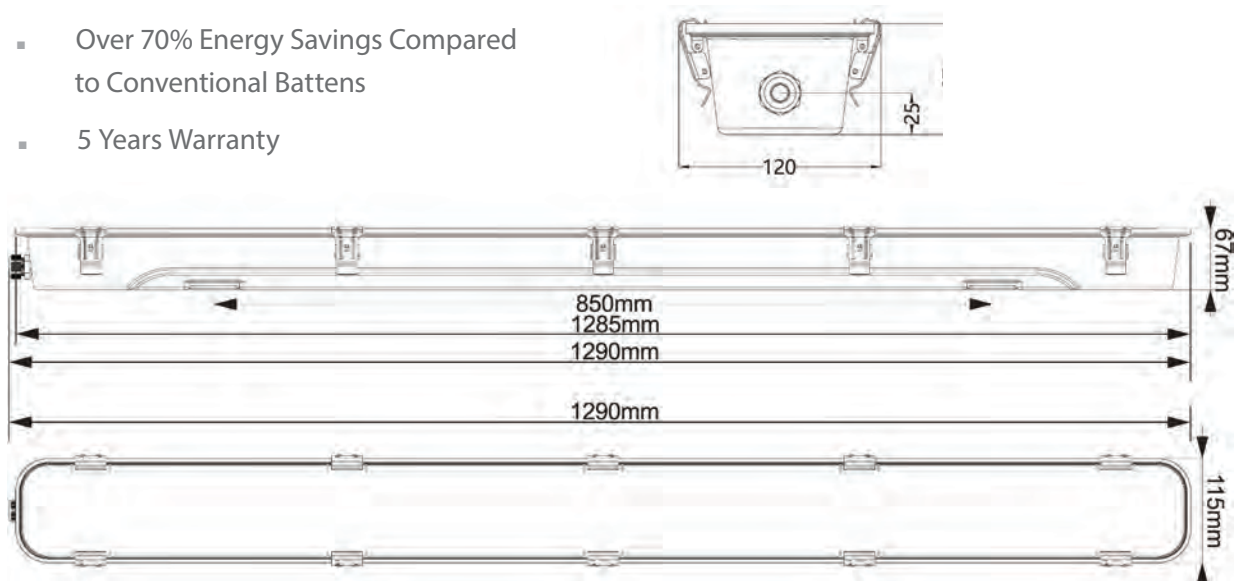

Specification S-LED₂ Stainless Steel Luminaire

PRODUCT CODE	DSST-30W-1200	DSST-60W-1200
Power (W)+/_ 10%	30W	60W
Input Voltage/Frequency	AC 220-240V, 50/60Hz	
Installation	Easy and quick to install under ceiling or on surface	
Housing / Diffuser	Stainless steel housing and tempered glass diffuser (clear or frosted)	
Driver	Osram / Philips / Tridonic	
LED Brand	SMD2835 LG	
CCT	2700-6500K (ANSI C78.377)	
CRI	>80	
PF	PF>0.9	
Beam Angle	90° 120°	
IP Rating	IP65	
Warranty	5 years	
Operating Temperature	-40°C – 55°	
Dimensions	1290mm x 115mm x 67mm	
N.W. (kgs)	3.6	
Qty (pcs)	1	