ALDRIDGE VAS/AWS

Vehicle Activated Signs/Advance Warning Signs



Proudly Designed and Manufactured by Aldridge Traffic Systems in Australia From the Brand You Know and Trust for Over 40 Years

Electronic Signs



Aldridge Traffic System (ATS) electronic signage are built to withstand the harshest of environments. These units are weatherproof and low maintenance with ultimate power efficiency and designed for easy installation. ATS signs feature long-life, ultra-bright, superior quality LEDs, with automatic brightness adjustment and flicker-free technology. ATS electronic signage are available with full matrix display area, capable of displaying more complex text, multiple speeds and graphics, as well as discrete character displays, typically used for single or dual speed variants which can also be used for multiple displays. ATS signs are available in Australian standard types A, B, C sizes.

Each sign has a secondary battery backup. The cabinet housings are secure and lockable and include a facility key switch for road workers, police and emergency services, meeting all communication security compliance standards.

ATS electronic signs are designed to communicate via the most commonly used VicRoads and TfNSW protocols along with Traffic Technologies proprietary platform TST, giving total control and diagnostic information.

Aldridge Electronic LED Signs include:

- School Zones
- Variable Speed Limit Signs (VSL)
- No Right Turn / No Left Turn (NRT / NLT)
- Electronic Speed Limit Signs (ESLS)
- Electronic Message Signs (EMS)
- Variable Message Signs (VMS)
- Vehicle Activated Signs (VAS)
- Advance Warning Signs (AWS)
- Portable Activated Signs (VAS)





DESCRIPTION

Manufactured in Australia by Aldridge Traffic Systems (ATS), the Vehicle Activated Signs (VAS) are designed to operate in conjunction with a radar or other detection device. VAS can be triggered by an approaching vehicle exceeding the preset speed threshold, the flashing amber lamps and/or additional text warning message will illuminate to remind the driver to slow down and approach with caution.

ATS Advance Warning Signs (AWS) are the same quality and build as the VAS and are activated by the traffic signal controls, these are used as an advance warning to signalised intersections. Both VAS and AWS are installed at a distance ahead of a hazardous situation or unsafe driving condition, to allow vehicles time to slow down in situations such as adverse weather, obstruction, road closure, detours, school zones, traffic control, roadworks or junctions.

Signs available in A, B or C sizes. Static or Portable.

Signs Available in AS1743 Type A, B, C	
Standard - Amber Lamps	Additional Text Box
A H 1445 x W 1000 mm	A H 1770 x W 1000 mm
B H 1645 x W 1200 mm	B H 2075 x W 1200 mm
C H 1945 x W 1500 mm	C H 2470 x W 1500 mm
VAS with Additional LED Warning Message	H 2465 x W 1500 mm
Aluminium poles 102 mm Dia. 1 or 2 poles required depending on size and weight.	

Applications include:

- **Hazardous Junctions**
- Low Bridge
- **Road Closures**
- Flood Prone Areas
- **Detours**
- **Traffic Signals**
- **Level Crossings**

- Roadworks
- Falling Rocks
- School Zones
- Hospitals
- **Aged Care Homes**


Ice and Snow

Fire Stations

- Ambulance Stations
- Adverse Weather
- Hairpin Bends
- Cattle and Livestock
- Cyclists
- Horse Riders
- Truck Entry

Both sign systems use a high intensity white or amber LED display. Utilising the latest electronic hardware and software technology. The sign displays bright, clear and concise messages with flicker-free technology. VAS/AWS can be custom made to display a warning message in addition to an appropriate road sign. (See the following pages for all available options).

All signs are designed and manufactured to the AS5156 standard and communicate via the most commonly used road authority protocols, along with Traffic Technologies proprietary platform TST, giving total control and diagnostic information.

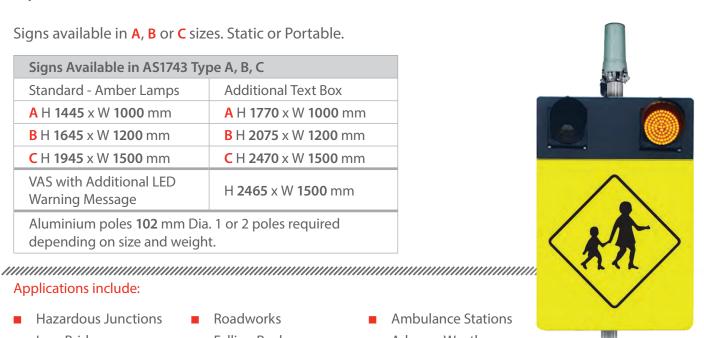

ADDITIONAL LED WARNING MESSAGE









Intermittent one or two part message warning: 'Slow Down' – 'Too Fast', are designed to activate when an approaching vehicle is exceeding the set speed limit. All VAS/AWS are available with an activated LED text message and alternating flashing amber lamps. Speak to our company representatives for further information.

Available in A, B or C sizes. See page 18 for full details and sizing.

PRINTED WARNING TEXT BOX















In addition to flashing amber lights, VAS/AWS can be manufactured with an additional printed text box to caution drivers of the potentially hazardous conditions ahead.

All signage in this catalogue can be produced using this design and style.



PORTABLE/TEMPORARY SIGNS

The Aldridge VAS and AWS range can be manufactured as a portable system for temporary installations and permanent installs in areas with no mains power supply. These are built using our solar panels and can be designed and produced with additional printed text message or activated electronic LED messages. Other addons can be included, for example: a weather station or temperature guage.

Standard available options:

- VAS Radar activation mounted on sign
- VAS Remote radar activation
- Temperature sensor activation

The following pages show the standard warning signs with reference codes, available from ATS.



VAS OR AWS - SOLAR OR MAINS POWERED - YOU CHOSE



W9-1 A/B/C (L or R)



W9-2 A/B/C (L or R)



W9-3 A/B/C (L or R)



W9-4 A/B/C (L or R)



MERGING TRAFFIC W5-34 A/B/C (L or R)



ADDED LANE W5-35 A/B/C (L or R)



SIDE ROAD
JUNCTION RIGHT
W2-4
A/B/C (L or R)



SIDE ROAD
JUNCTION RIGHT
W2-4
A/B/C (L or R)



JUNCTION
W2-8
A/B/C (L or R)



SUCCESSIVE SIDE ROAD JUNCTION W2-13 A/B/C (L or R)



VAS/AWS RANGE



CROSS ROAD W2-1 A/B/C (L or R)



T-JUNCTION W2-3 A/B/C



TURN W1-1 A/B/C (L or R)



TWO WAY TRAFFIC W4-11 A/B/C



LANE ALLOCATION W4-10 A/B/C



REVERSE CURVE W1-4 A/B/C (L or R)



W1-2 A/B/C (L or R)



CURVE W1-3 A/B/C (L or R)



W1-7 A/B/C (L or R)



WINDING ROAD W1-5 A/B/C (L or R)



SUCCESSIVE SIDE ROAD JUNCTION W2-11 A/B/C (L or R)



SUCCESSIVE SIDE ROAD JUNCTION W2-12 A/B/C (L or R)



CROSSROAD ON CURVE W2-15 (L or R)



SIDE ROAD JUNCTION
ON A CURVE
W2-9
A/B/C (L or R)



SIDE ROAD JUNCTION
ON A CURVE
W2-10
A/B/C (L or R)



T JUNCTION BEYOND W2-14 A/B/C (L or R)



ROUNDABOUT W2-7 A/B/C



DIVIDED ROAD W4-4 A/B/C/D



NARROW BRIDGE W4-1 A/B/C



ROAD NARROWS W4-3 A/B/C



ROAD HUMP W5-10 A/B/C



ROAD HUMPS AHEAD W3-4 A/B/C



STEEP DESCENT W5-12 A/B/C



STEEP CLIMB W5-13 A/B/C



SIGNALS AHEAD W3-3 A/B/C



HORSE AND RIDER W-H&R A/B/C



KANGAROOS W5-29 A/B/C



KOALAS W5-47 A/B/C



WOMBATS W5-48 A/B/C



SLIPPERY W5-20 A/B/C



AIRCRAFT W5-30 A/B/C



BICYCLES W6-7 A/B/C



FALLING ROCKS W5-42 A/B/C (L or R)



TRUCKS CROSSING OR ENTERING W5-22 A/B/C



W-RAISPAV A/B/C



GIVE WAY SIGN AHEAD W3-2 A/B/C



STOP AHEAD W3-1 A/B/C



HOSPITAL W6-6 A/B/C



AMBULANCE STATION W5-37 A/B/C



FIRE STATION W5-36 A/B/C

VAS/AWS RANGE



GRAVEL ROAD W5-19 A/B/C



ROAD AHEAD W6-8 A/B/C



ROAD ENDS W5-18 A/B/C



SLOW POINT W5-33 A/B/C



TREES CLOSE TO ROAD
VIC ONLY
W5-V127
A/B/C



TRUCKS TURNING W5-205 A/B/C



DRY WEATHER ROAD ONLY W-DWRO A/B/C



W4-9 A/B/C



CREST W5-11 A/B/C



DIP W5-9 A/B/C



FORD W5-6 A/B/C



GATE W5-14 A/B/C



GRID W5-16 A/B/C



ISLAND W4-5 A/B/C



FERRY W5-1 A/B/C



LOW CLEARANCE ...m (AHEAD) W4-8 A/B/C



LOW LEVEL BRIDGE W5-8 A/B/C



OPENING BRIDGE W5-2 A/B/C



FLOODWAYS W5-7-1 A/B/C



FLOODWAYS W5-7-2 A/B/C

VAS/AWS RANGE - WESTERN AUSTRALIA ONLY



WA ONLY
MR-WDAD-2



WA ONLY
MR-WDAD-3



WA ONLY
MR-WDAD-6



WA ONLY
MR-WDAD-7



WA ONLY
MR-WDAD-8



WA ONLY
MR-WDAD-9



WA ONLY
MR-WDAD-10



WA ONLY
MR-WDAD-11



WA ONLY
MR-WDAD-12



WA ONLY
MR-WDAD-13



WA ONLY
MR-WDAD-14



WA ONLY
MR-WDAD-15



WA ONLY
MR-WDAD-16



WA ONLY
MR-WDAD-17



WA ONLY
MR-WDAD-18



WA ONLY
MR-WDAD-19



WA ONLY
MR-WDAD-20



VAS/AWS SCHOOL SIGNAGE



SCHOOL BUS W6-204 A/B/C



CHILDREN W6-3 A/B/C



PEDESTRIANS W6-1 A/B/C



PEDESTRIAN CROSSING AHEAD W6-2 A/B/C

SCHOOL & PEDESTRIAN QUEENSLAND ONLY



TC1193



SCHOOL TC1192



SCHOOL CROSSING AHEAD QLD TC1194



VAS/AWS RANGE RAILWAY SIGNAGE



TRAIN CROSSING RIGHT ANGLE W7-8 A/B/C



TRAIN CROSSING ANGLE W7-9 A/B/C (L or R)



TRAIN CROSSING
T-JUNCTION
W7-12
A/B/C (L or R)



TRAIN CROSSING INTERSECTION W7-13 A/B/C (L or R)



RAILWAY GATE W7-15 A/B/C



RAILWAY LEVEL CROSSING FLASHING SIGNAL AHEAD W7-4 A/B/C



TRAIN W7-7 A/B/C (L or R)



TRANSPORTABLE

The Portable VAS/AWS signs are designed for locations where there is no mains power available or as a temporary sign solution.

The transportable system is ideal for remote locations, emergencies, road hazards, floods, roadworks and construction sites. The system comes complete with sign, poles, support cage, amber lamps, control unit and housing, solar panel, radar (AWS only) and battery package.

Graphic signs available in AS1743 standard A, B or C sizes.

Signs Available in AS1743 Type A, B, C Standard A H 1445 x W 1000 mm B H 1645 x W 1200 mm C H 1945 x W 1500 mm Aluminium poles 102 mm Dia. 1 or 2 poles

With optimum visability, the amber LED lamps flash alternately when triggered by an approaching vehicle.


required depending on size and weight.

VAS/AWS are available with additional text box or activated LED messaging.

Speak to your representative for your requirements and specifications.

Applications include:

- Road Works
- Construction Sites
- Floods
- Temporary Traffic Signals
- Level Crossings Removals
- Ice and Snow
- Events
- Remote Locations

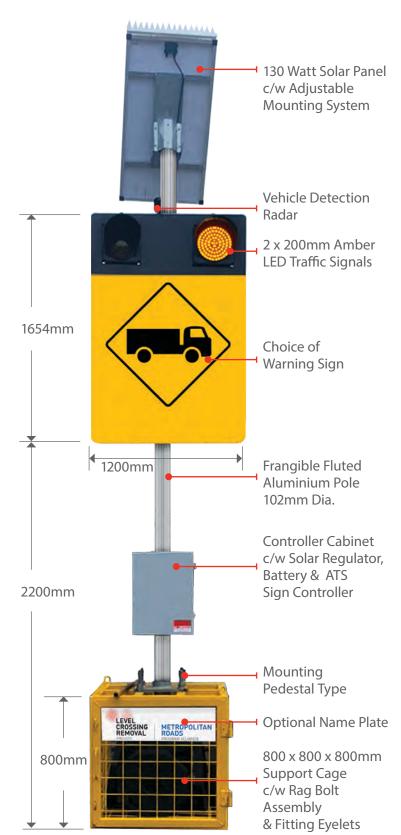

VAS SIZES AND INFORMATION




ELECTRONIC MESSAGE SIZES & INFORMATION

VAS/AWS Electronic LED Features:

- Full dot matrix or discrete display
- High brightness white/amber LED display
- Vehicle detection
- Radar detection (AWS only)
- Alternate flashing amber lamps
- Time based schedule display function
- Sign dimensions: A, B or C size
- LED warning message: Variable
- Designed to comply with current Australian road authority standards





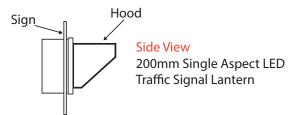


Signs Sizes Available		
Amber Lamps + Activated LED Warning	Activated LED Warning Only	
	A H varies x W 1000 mm*	
C H 2465 x W 1500 mm	B H varies x W 1200 mm*	
	C H varies x W 1500 mm*	

* Height is variable, dependent on LED message

Vehicle Triggered Alternate Flashing Amber Lamps

2465

'C' Size

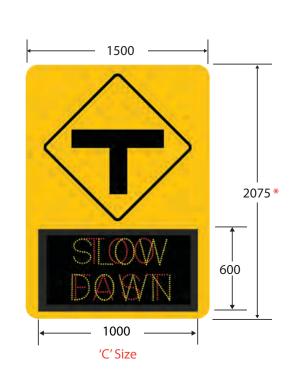

VAS SIZES & INFORMATION

VAS/AWS Features:

- Vehicle detection
- Alternate flashing amber lamps
- Radar detection (AWS only)
- Sign dimensions: A, B or C size
- Designed to comply with current Australian road authority standards











'B' Size



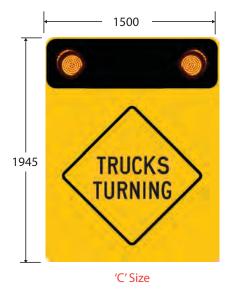

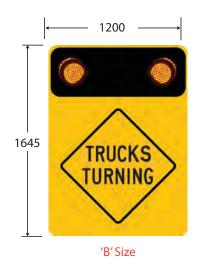

1445
TRUCKS
TURNING
'A' Size

1000



Aldridge Traffic Systems Pty Ltd

12 - 14 Leeds Street Rhodes NSW 2138

www.trafficltd.com.au

NSW

P: +61 2 9736 3677 F: +61 2 9736 3391 e: info@trafficltd.com.au

NT

P: +61 8 8947 0733 F: +61 8 8947 0713 e: info@trafficltd.com.au

OLD

P: +61 7 3184 2000 F: +61 7 3266 2244 e: info@trafficltd.com.au

VIC

P: +61 3 9430 0222 F: +61 3 9430 0244 e: info@trafficltd.com.au

ACT

P: +61 2 6299 7922 F: +61 2 6299 7977 e: info@trafficltd.com.au

TAS

P: +61 3 6273 1177 F: +61 3 6273 1759 e: info@trafficltd.com.au

SA

P: +61 8 8362 2385

e: info@trafficltd.com.au

WA

P: +61 8 9248 1002 F: +61 8 9209 2288 e: info@trafficltd.com.au

UNITED KINGDOM

P: +44 (0) 1159 223 797 F: +44 (0) 1159 223 836 e: info@aldridgetraffic.co.uk











