ALDRIDGE



LED Lighting for Residential Roads















Aldridge Roadway Lighting Solutions

LED street lights improve energy efficiency and energy affordability for local government, improve road safety and support the Government's smart cities agenda.

Aldridge Traffic Systems (ATS) design, manufacture and supply state-of-the-art vehicle and pedestrian LED lighting for major arterial roads, tunnels, underpasses, major intersections, low-traffic urban roads, public spaces, sports grounds and car parks.

With over 30 years experience, Aldridge has the technology and experience required to obtain the best illumination results for safe night time motoring in all road conditions. Together with energy cost savings which far exceed expectations, Aldridge provide a total lighting solution for the safety of motorists and pedestrians.

Aldridge have been supplying prominent roadway and pedestrian lighting projects throughout Australia and worldwide. Aldridge LED lighting systems use the latest technology through our smart city technology platform – TST, which can be customised to provide the most effective and efficient lighting schemes which comply with the requirements of Australian Standard AS/NZS1158 for both vehicle and pedestrian (V and P Categories).

Our design service utilises cutting edge technology along with NATA photometric data in order to provide the best solutions to meet the most stringent industry requirements.

Our experienced delivery team design, audit, deliver, install and maintain all facets of this exciting industry.

For a comprehensive guide to our lighting products please contact us to get our latest catalogue.

Residential



'P-LED' Installation, Tasmania






















P-LED

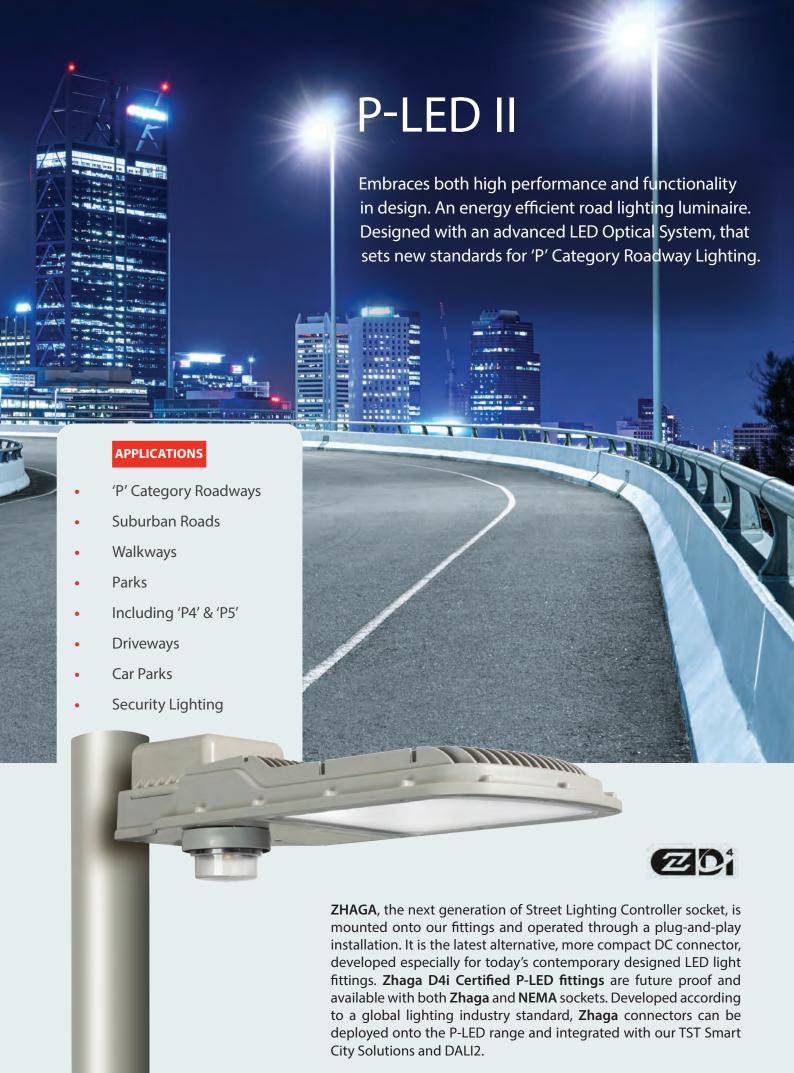

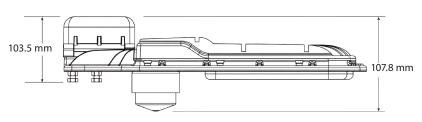



Features

- TST Smart City Ready
- SmartCity Ready TST compatibility Zigbee, LoRa, NBIoT
- High Performance Street Lighting luminaire designed to meet stringent Australian/New Zealand standards
- High Performance Optics designed to comply and meet Australian standards AS/NZS 1158.3.1:2020
- Direct replacement of conventional P-category Mercury Vapour, Metal Halide, High Pressure Sodium and Fluorescent luminaires
- Integrated thermal management
- Segregated termination chamber c/w quick access latch
- Self cleaning housing and PMMA optical diffuser
- Semi-cutoff (SD Std) and Aero screen diffusers (AE)
- 20 year design life
- 10 year warranty
- Listed on AEMO NEM Load Table

Technical Data

Body: High Pressure Marine Grade

Die Cast Aluminum

Optics: P4 & P5 Distribution

LED: CREE

System Watts: 13 - 17 - 23 - 30 - 40 - 60

Finishing: Powder Coat Grey (Grey Standard)

Mounting: 4 - 9 Metres

Fixing: Side Spigot Mount (27-35mm OD)

■ IP rating: IP65 ■ IK rating: IK06

■ **Voltage:** 220V - 240V 50/60Hz

Power Factor: >0.9

Controller: 7 Pin NEMA receptacle (std)Surge Protection Device (SPD): 10KVa Standard


Options

- Controller: Zhaga Book 18
- DALI-2 D4i Driver
- Fuse Terminal Block/FTB
- Surge Protection Device/SPD20KVA
- Class II/Double Insulated (DB)
- Colour: Grey (GR Standard), Black (BL), White (WH),
- CCT: 4000K (Standard)/3000K
- Visor: Glareshield/anti-spill light kit (GV)

Photometric Design Data

IES ROAD REPORT PHOTOMETRIC FILENAME: 210289PH.IES

POLAR GRAPH



Maximum Candela = 873.74 Located At Horizontal Angle = 300, Vertical Angle = 68 # 1 - Vertical Plane Through Horizontal Angles (300 - 120) (Through Max. Cd.) # 2 - Horizontal Cone Through Vertical Angle (68) (Through Max. Cd.)

Specification P-LED II

PRODUCT CODE	PLED.II.13W	PLED.II.14W	PLED.II.20W	PLED.II.30W	PLED.II.40W	PLED.II.60W
System Watts	13	17	23	30	40	60
Input Voltage	220V - 240V 50/60Hz					
CCT (K)	4000	4000	4000	4000	4000	4000
CRI	Ra>80	Ra>80	Ra>80	Ra>80	Ra>80	Ra>80
IP Protection	IP65	IP65	IP65	IP65	IP65	IP65
IK Protection	IK06	IK06	IK06	IK06	IK06	IK06
Weight (Kg)-max.	<5kg	<5kg	5kg	6.8kg	6.8kg	7.4kg





BOSTON SE



BOSTON TE



BERLIN



Highways and Major Roads

V-LED MID



V-LED MKII



BOSTON V



H-LED









Residential Roads

COMO C COMO P COMO S COMO T









FLAT S



FLAT M



FLAT L



Tunnels and Underpasses

T-LED



V-LED MID



V-LED MKII



FLUD S



FLUD M



FLUD L



S-LED





Before and After Installation - Hobart Tasmania

NSW

P: +61 2 9701 9900 F: +61 2 9736 3391 e: info@trafficltd.com.au

NT

P: +61 8 8947 0733 F: +61 8 8947 0713 e: info@trafficltd.com.au

OLD

P: +61 7 3184 2000 F: +61 7 3266 2244 e: info@trafficltd.com.au

VIC

P: +61 3 9430 0222 F: +61 3 9430 0244 e: info@trafficltd.com.au

ACT

P: +61 2 6299 7922 F: +61 2 6299 7977 e: info@trafficltd.com.au

TAS

P: +61 3 6273 1177 F: +61 3 6273 1759 e: info@trafficltd.com.au

SA

P: +61 8 8362 2385

e: info@trafficltd.com.au

WA

P: +61 8 9248 1002 F: +61 8 9209 2288 e: info@trafficltd.com.au

UNITED KINGDOM

P: +44 (0) 1159 223 797 F: +44 (0) 1159 223 836 e: info@aldridgetraffic.co.uk